

## 1 channel D1 Network Video Encoder (H.264)

- 1 channel H.264 D1 Network Video Encoder
- Embedded Intelligent Video Analytics
- Two-way Audio
- H.264 Full Frame at D1
- Video Compression: H.264, MPEG-4, MJPEG
- Dual Stream
- Deinterlacing on DSP
- Audio Compression: G.711
- RS-232C, RS-485 Support
- Burnt-in Text, Video Motion Detection Support
- USB 2.0 Support (Local storage, Wireless LAN)
- Remote Firmware Upgrade over Network
- Comprehensive SDK Support




Intelligent  
Video Analytics  
included

### Specifications

Video	
Input	1 channel
Output	1 Loop Out
Compression Format	H.264, MPEG-4, MJPEG
Number of Streams	Dual Stream, Configurable
Resolution	D1, CIF, QCIF
Frame Rate	Full-frame@D1
Deinterlacing	Support (DSP)
Motion Detection	Support (DSP)
Burnt-in Text (Digital)	Support (DSP)
Audio	
Input	1 channel
Output	1 channel
Compression Format	G.711
Function	
Digital Input	2
Digital Output	2
RS-485/422	Support (RS-485 Only)
RS-232C	Support
Network	10 / 100 Base-T
Protocol	TCP/IP, UDP/IP, HTTP, RTSP, RTP/UDP, RTP/TCP, SNTP, mDNS, UPnP, SMTP, SOCK, IGMP, DHCP, DDNS, SSL v2/v3, IEEE 802.1X, SSH, SNMP v2/v3
USB 2.0	Support
SD Memory	Support (Optional)
Electrical	
Power Source	12V DC (DC Jack)
Power over Ethernet	Support (IEEE 802.3af)
Power Consumption (Approx)	240 mA @ 12V DC
Environmental	
Operating Temperature	-20 °C ~ 60 °C (-4 °F ~ 140 °F)
Operating Humidity	Up to 85% RH (Non-condensing)
Mechanical	
Dimension	103(W) x 38(H) x 141(D) mm
Weight (Approx)	385 g

Video Content Analysis (Included as Standard)	
High Performance	Advanced Tracking Algorithm, Low False Alarm Rate
Easy to Use	Intuitive Web Browser Interface
Detection Zones	Multi-segment Polygons and Lines
On-screen Display	Real-time Display of Tracking Data and Events
Camera Shake Cancellation	Improve the VCA performance with cameras that are prone to shake
Tamper Detection	Detect camera tampering
Video Content Analysis (Option)	
Detection Behavior	Direction, Stopping, Loitering, Entering, Exiting, Appear, and Disappear Filters Abandoned/Removed Object Detection, Tailgating Detection
3D Behavior Statistics	Perspective Corrected Size and Speed Filters Counting Functions and Other Statistics
Meta Data	Plain XML Format
Image Stabilization (Option)	
Electronic Stabilization	Removes Camera Sway

### Dimension

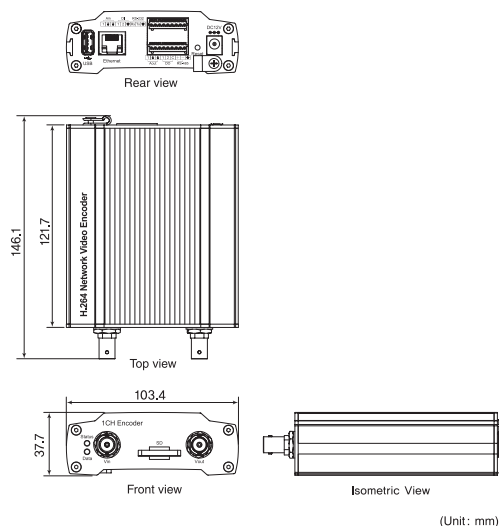

**EOS AUSTRALIA PTY LTD**

We strive to give peace of mind to millions.  
Sydney | Melbourne | Brisbane | Perth | Auckland

[www.eos.com.au](http://www.eos.com.au)

Unit 31/ 7-9, Percy Street, Auburn, NSW-2144

P: +61 02 9749 5888, F: +61 02 9749 5887



**EOS NEW ZEALAND LTD**

We strive to give peace of mind to millions.

[www.eoscctv.co.nz](http://www.eoscctv.co.nz)

Unit B/156, Bush Road, Albany, Auckland

P: +64 09 448 2040, F: +64 09 448 1178